

ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA

Electronic hot water meter single jet ELECTO SJ MID R160 with rotating dial for water distribution.
Horizontal or vertical position without straight length upstream and downstream needed (U0/D0).
Built-in Wireless M-Bus and LoRaWAN , OMS.



Size : DN15 to DN20
Connection : Male BSP
Min Temperature : +30°C
Max Temperature : +90°C
Max Pressure : 16 Bars
Specifications : Single jet
Rotating dial
Electronic dial
High protection against external magnetic fields
LoRa WAN and Wireless M-BUS

Materials : Brass body CW617N-4MS according to EN 12165

LoRaWAN® is a trademark of SEMTECH

Sferaco 90 rue du Ruisseau 38297 St Quentin Fallavier Tel: + 33 (0) 474.94.15.90 Fax: + 33 (0) 474.95.62.08 Internet: www.sferaco.com E-mail : info@sferaco.fr

ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA


SPECIFICATIONS :

- LoRaWAN and Wireless radio MBUS
- Single jet type
- **MID R160** for horizontal position and horizontal dial (respect the flow direction indicated by the arrow)
- **MID R63** for vertical position or horizontal position with vertical dial (respect the flow direction indicated by the arrow)
- Electronic rotating dial
- IP68 protection
- Long time lithium battery up to 10 years with factory settings
- Fault detection : loss, overconsumption, reverse flow, blocked meter and reversed meter
- More than 11000 values can be saved
- Horizontal position without straight length needed (U0D0)
- 4MS brass body


USE :

- Water distribution
- Min and max temperature Ts : +30°C to +90°C
- Max Pressure Ps : 16 bars

HEAD LOSS GRAPH :

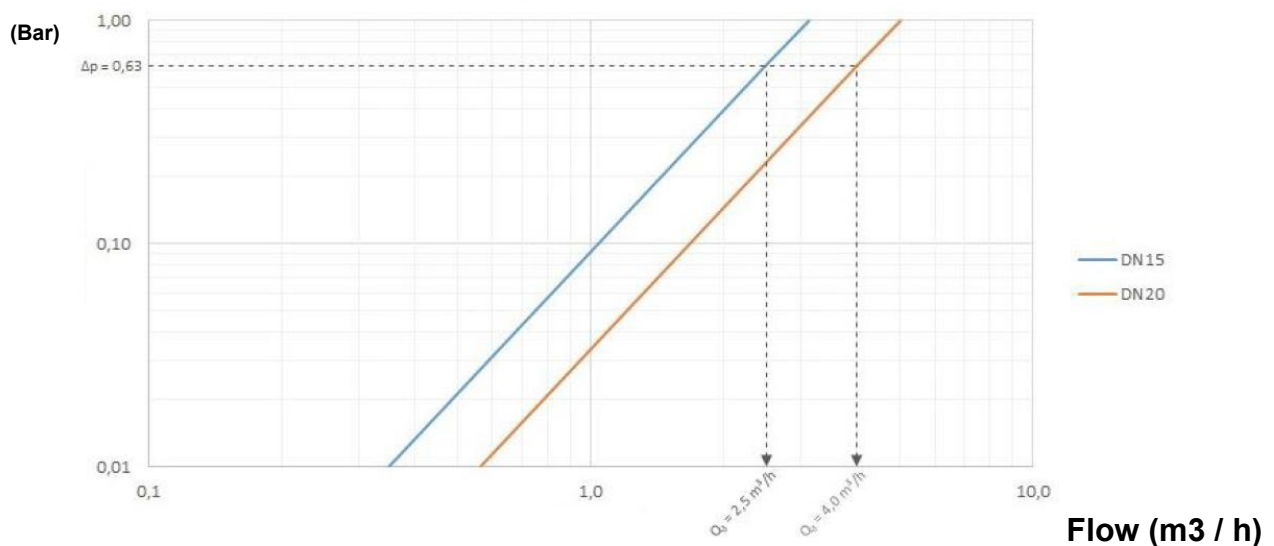

TYPICAL ERROR CURVE :

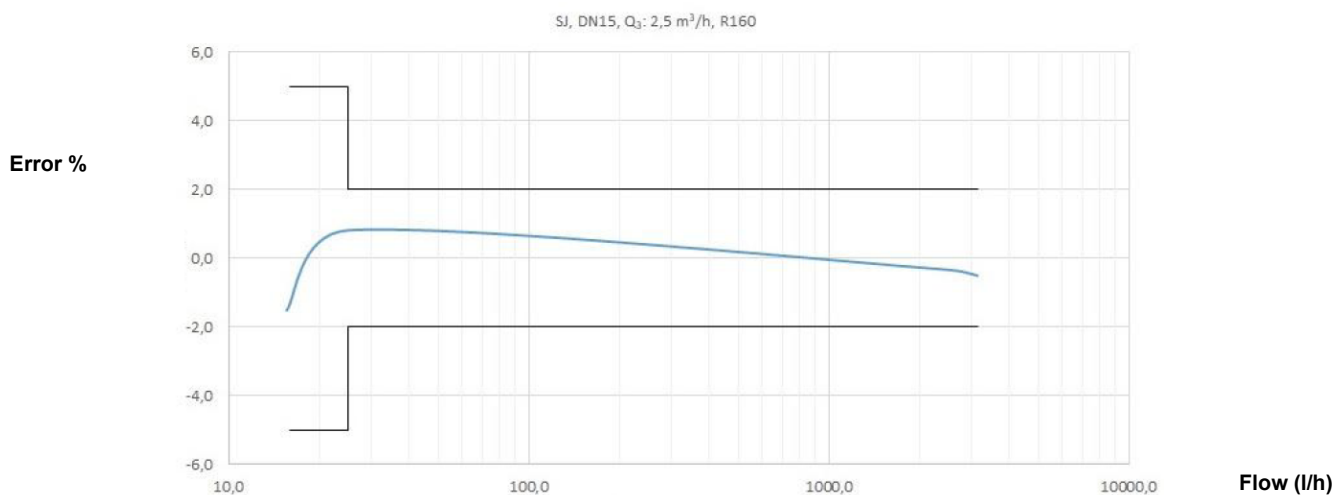

Sferaco 90 rue du Ruisseau 38297 St Quentin Fallavier Tel: + 33 (0) 474.94.15.90 Fax: + 33 (0) 474.95.62.08 Internet: www.sferaco.com E-mail: info@sferaco.fr


ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA

RANGE :

- Electronic single jet ELECTO SJ hot water meter MID R160 Lora+ Wireless M-Bus **Ref.2709MP** DN15 to DN20

ACCESSOIRES :

MULTI RADIO SETTING :



- Application ELECTO MVM available on Playstore to modify the radio setting

READING WIRELESS MBUS AND RADIO SETTING :



- RADIO transceiver UNICO with external antenna (USB or Bluetooth connection) **Ref.2749024B**
UNICO is needed for the ANDROID application on the Playstore

WIRELESS MBUS READING :



- RADIO ARROW MOBILE software
Ref.2749014

ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA

ACCESSORIES :



- Brass water meter stand with fix and sliding fitting DN15 **Ref. 9851000**



- Free nut water meter union with hole for filling on nut – Male BSP
 - DN15 F3/4"- M1/2" **Ref. 9811054**
 - DN15 F3/4"- M3/4" **Ref. 9811094**
 - DN20 F1" – M3/4" **Ref. 9811065**



- Plastic antifraud seal
 - DN15 **Ref. 9811040**
 - DN20 **Ref. 9811041**




- Nylon + 30% glass fibers pipe Male BSP (waiting for water meter)
 - DN15 length 110 **Ref. 9811053**
 - DN20 length 130 **Ref. 9811055**



- Brass pipe male BSP threaded
 - For water meter DN15 length 110 **Ref. 9811045**

ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA

SIZE (in mm) :

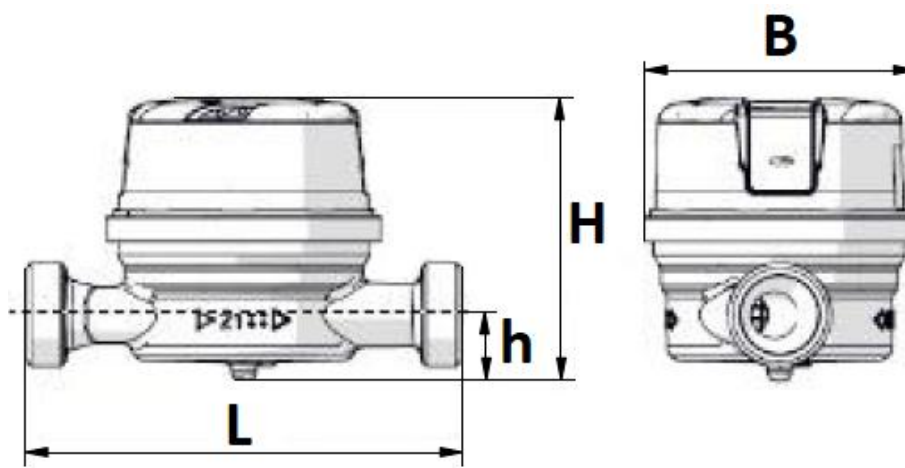

Bore	15	20
DN	3/4"	1"
L	110	130
Ø B	75	
H	84	
h	16.7	
Weight (in Kg)	0.4	0.57
Ref.	2709015MP	2709020MP

ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA
TECHNICAL FEATURES :

Bore	15	20
Max flow Q4 max (m3/h)	3.13	5
Nominal flow rate Q3 (m3/h)	2.5	4
Min flow rate MID R160 Q1 with $\pm 5\%$ error (l/h)	15.6	25
Min flow rate MID R63 Q1 with $\pm 5\%$ error (l/h)	39.7	63
Transitional flow rate Q2 MID R160 with $\pm 3\%$ error (L/h)	25	40
Transitional flow rate Q2 MID R63 with $\pm 3\%$ error (L/h)	63.5	102
Starting flow rate (l/h)	4.5	8
Head loss class (ΔP @ Q3)	ΔP 63	
Min reading (L)	1	
Max reading (m3)	999.999	
Environmental class	0	
Mechanical class	M1	
Electromagnetic class	E2	
Accuracy class	2	
Battery	Lithium battery	


ELECTRONIC HOT WATER METER SINGLE JET MID R160 ELECTO SJ LORA

STANDARDS :


- Manufacturer certified ISO 9001 : 2015 and ISO 14001 :2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (article 1, § 2b)
- Water Meters according to directive **2014/32/EU MID (annex MI001)**
- Designing according to **ISO 4064**
- French water agreement **A.C.S. N° 25 ACC LY 180**
- Male BSP cylindrical threading according to ISO 228-1

INSTALLATION POSITIONS :

HORIZONTAL :




Class MID R=160



Class MID R=63
(Vertical dial assimilated to vertical position)

VERTICAL* :

*** : In vertical position, the metering precision of the meter is going to be slightly altered, and the pipe should always be full of water.**



Class MID R=63

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.