

ANGLE BRASS BALL VALVE WITH INTEGRATED MOUNTING FIX'IN ACS 4MS

Angle brass ball valve with integrated mounting Fix'in ACS 4MS with butterfly handle for water distribution.

Integrated mounting for an easier installation and a short length.

Hidden and strong mounting, with accessories for all types of supports (wood, plasterboard...).

PTFE packing.

Suitable for drinking water thanks to the French ACS certification.



Size : DN1/2"-3/4"

Connection : Male BSP

Min Temperature : -10°C

Max Temperature : +80°C

Max Pressure : 10 Bars

Specifications : With integrated mounting
PTFE packing
Compact length

Materials : Brass CW617N-4MS according to EN 12165 chromed

ANGLE BRASS BALL VALVE WITH INTEGRATED MOUNTING FIX'IN ACS 4MS

SPECIFICATIONS :

- Integrated mounting for an easier installation
- Compact length
- Multiple positioning
- Hidden and strong mounting, with accessories for all types of supports (wood, plasterboard...)
- PTFE packing
- Black butterfly handle
- To be connected with free nut
- Chromed coating

USE :

- Water distribution
- Min Temperature Ts : - 10°C
- Max Temperature Ts : + 80°C
- Max Pressure Ps : 10 bars

RANGE :



- Angle brass ball valve Fix'in with screwed kit **Ref. 1385045** DN1/2"-3/4"
(Screwed Kit with : 1 screw M5x50, 1 wood screw M7x1.5-D.5.5x20, 1 plate flange et 1 domed flange)




- Angle brass ball valve Fix'in with screw magnet **Ref. 1385145** DN1/2"-3/4"



ANGLE BRASS BALL VALVE WITH INTEGRATED MOUNTING FIX'IN ACS 4MS


MATERIALS :

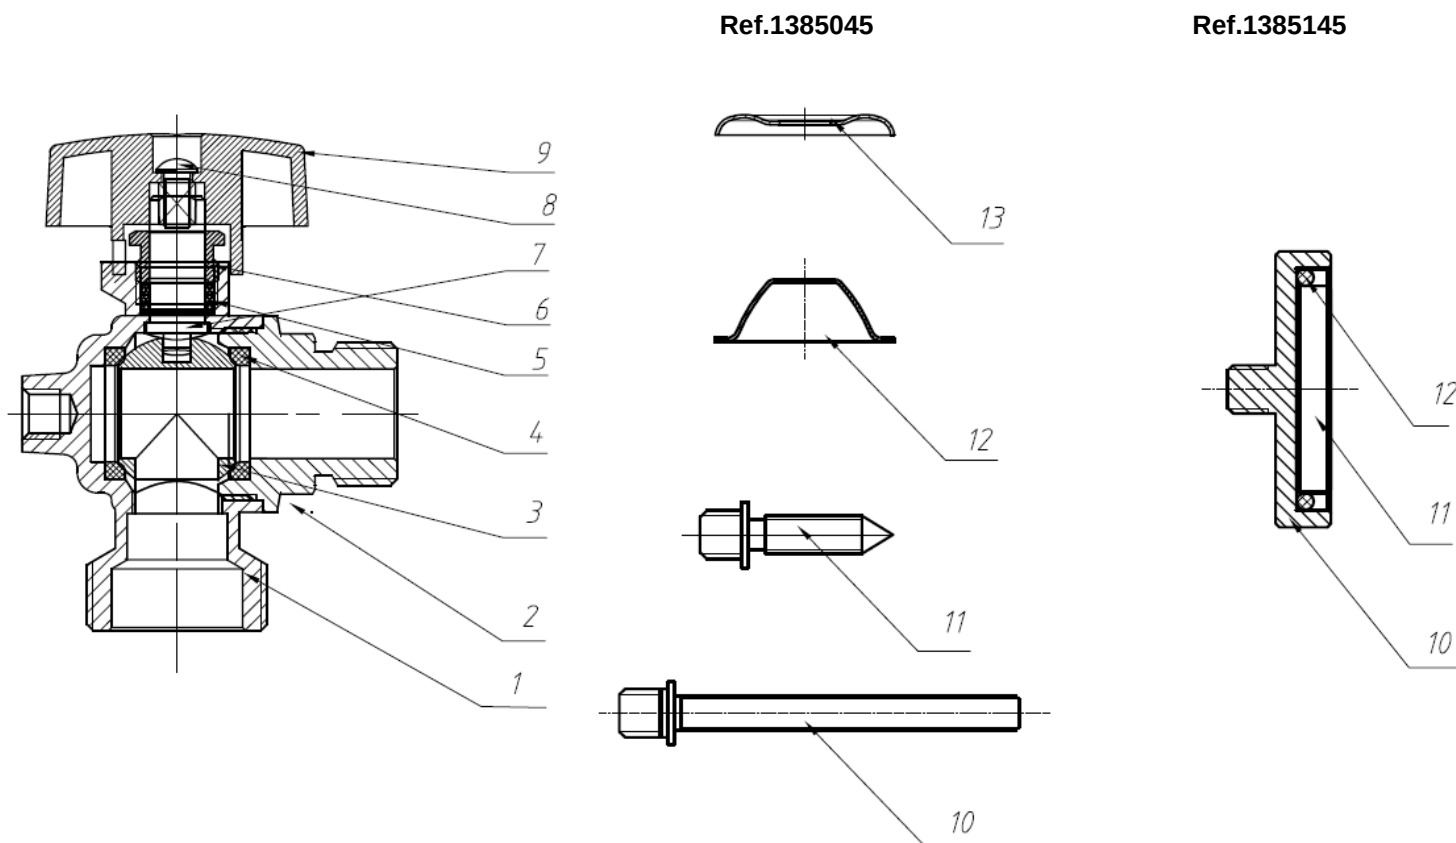

Item	Designation 1385045	Designation 1385145	Materials Ref.1385045	Materials Ref.1385145
1	Body		Chromed brass CW617N-4MS according to EN 12165	
2	Bonnet			
3	Ball			
4	Seat			
5	Packing		PTFE	
6	Packing nut		Chromed brass CW617N-4MS according to EN 12165	
7	Stem			
8	Handle screw			
9	Handle		Black aluminium	
10	Wood screw M5	Magnet support	Steel A3 nickel plating	Steel A3 nickel plating
11	Screw D.5,5	Magnet		-
12	Domed flange	O Ring		NBR
13	Plate flange			-

ANGLE BRASS BALL VALVE WITH INTEGRATED MOUNTING FIX'IN ACS 4MS

SIZE (in mm) :

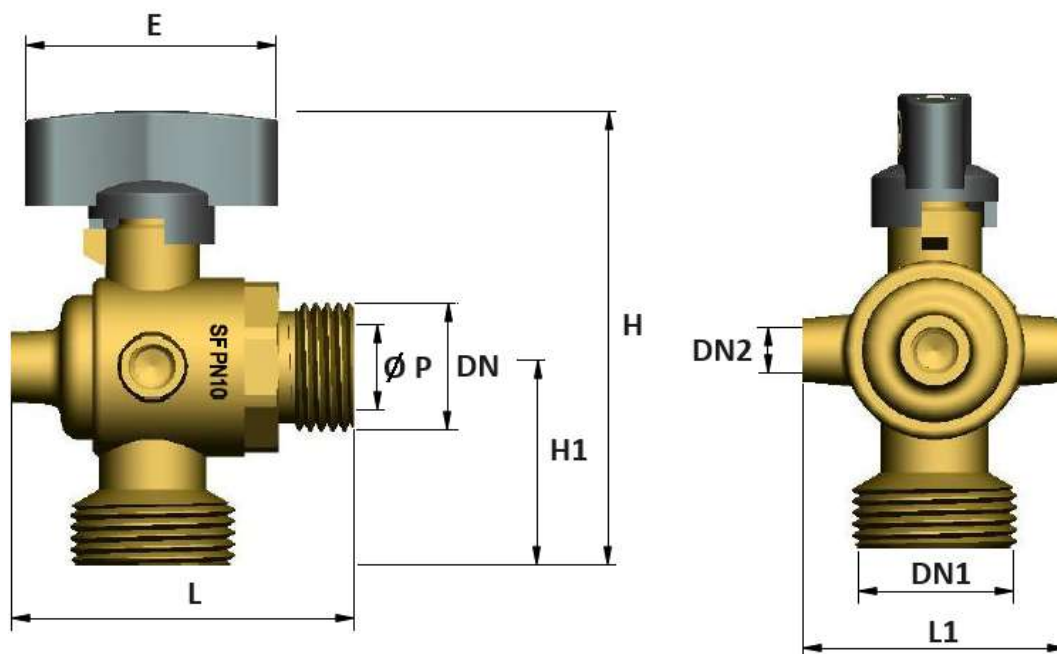

DN	1/2"
DN1	3/4"
DN2	M7x1.5
Ø P	13
L	54.5
L1	42
H	72
H1	31.5
E	40
Weight (in Kg) valve alone	0.18
Weight (Kg) Ref.1385045	0.22
Weight (Kg) Ref.1385145	0.27

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- French water agreement **A.C.S. N° 24 ACC LY 322**
- Male BSP cylindrical threaded ends according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.

Sferaco 90 rue du Ruisseau 38297 St Quentin Fallavier Tel: + 33 (0) 474.94.15.90 Fax: + 33 (0) 474.95.62.08 Internet: www.sferaco.com E-mail : info@sferaco.fr