

WATER SUPPLY BLIND FLANGE DUCTILE IRON RF PN10/16

Water supply blind flange ductile iron PN10/16 for water supply, drinking water, watering and distribution networks.
French water agreement ACS for drinking water.



Size : DN40 to DN300
Connection : PN10/16 RF
Min Temperature : +0°C
Max Temperature : +60°C
Max Pressure : 16 Bars
Specifications : Epoxy painting

Materials : Ductile iron EN GJS-500-7

WATER SUPPLY BLIND FLANGE DUCTILE IRON RF PN10/16

SPECIFICATIONS :

- Ductile iron body
- Flange PN10/16
- Epoxy painting blue color RAL 5017, 250μ thickness

USE:

- Water supply and distribution networks
- Min and max Temperature Ts : + 0°C to + 60°C
- Max Pressure Ps : 16 bars

RANGE :

- Blind flange PN10/16 **Ref.2511** from DN 40 to DN 300

ACCESSORIES :



- Undrilled black EPDM gasket ACS PN10/16 **Ref.9803178-9803187** from DN40 to DN300



- Drilled black EPDM gasket ACS PN10/16 **Ref.9803278-9803291** from DN40 to DN300



- Bolting kit, carbon steel Geomet 500 Grade B coated, 8.8 Class PN10/16 **Ref.2128** from DN40 to DN175




- Bolting kit, carbon steel Geomet 500 Grade B coated, 8.8 Class PN10 **Ref.2128** from DN200 to DN300



- Bolting kit, carbon steel Geomet 500 Grade B coated, 8.8 Class PN16 **Ref.2129** from DN200 to DN300

WATER SUPPLY BLIND FLANGE DUCTILE IRON RF PN10/16

SIZE (in mm) :

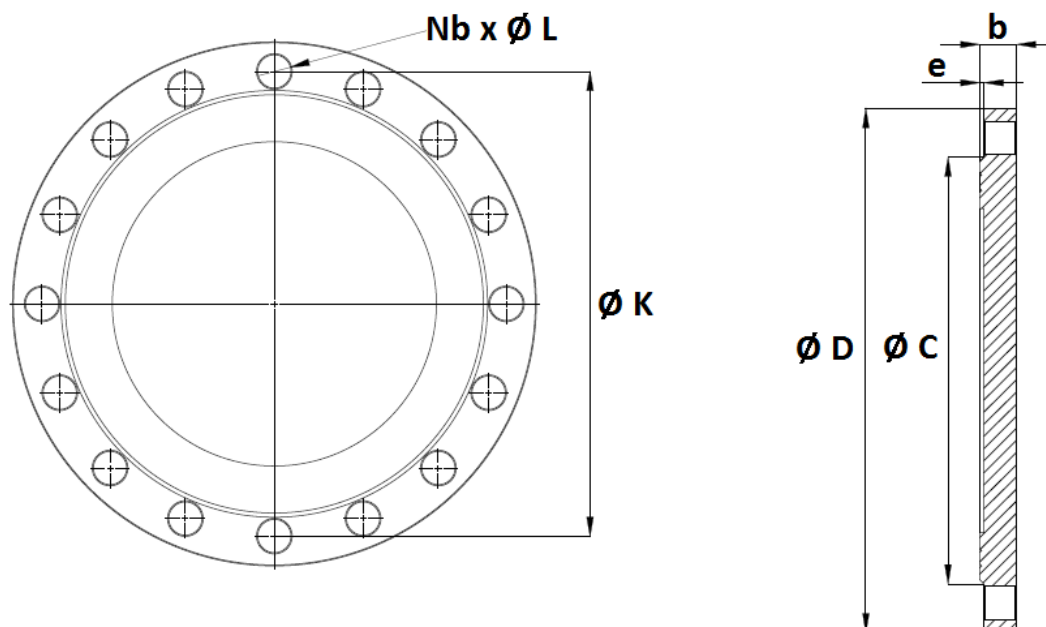

DN	40 PN10/16	50 PN10/16	60/65 PN10/16	80 PN10/16	100 PN10/16	125 PN10/16	150 PN10/16	200 PN10/16
Ø C	84	99	118	132	156	184	211	266
Ø D	150	165	185	200	220	250	285	340
Ø K	110	125	135-145	160	180	210	240	295
Nb x Ø L	4 x 19	4 x 19	4 x 19	8 x 19	8 x 19	8 x 19	8 x 23	8/12 x 23
b	19	19	19	19	19	19	19	20
e	3	3	3	3	3	3	3	3
Weight (Kg)	2	2.5	2.85	3.43	4.8	5.35	7.1	11
Ref.	2511040	2511050	2511060	2511080	2511100	2511125	2511150	2511200

DN	250 PN10/16*	250 PN16	300 PN10/16*	300 PN16	350 PN10/16
Ø C	319	319	370	370	429
Ø D	400	405	455	455	520
Ø K	350-355	355	400-410	410	460-470
Nb x Ø L	12x23-12x28	12 x 28	12x23-12x28	12 x 28	16x23-16x28
b	22	22	24	24.5	24.5
e	3	3	4	4	4
Weight (Kg)	16.31	16.31	22.5	22.35	32
Ref.	2511250	2511251	2511300	2511301	2511350

***modification in progress, evolution from PN10 to double drilling PN10/16**

Sferaco 90 rue du Ruisseau 38297 St Quentin Fallavier Tel: + 33 (0) 474.94.15.90 Fax: + 33 (0) 474.95.62.08 Internet: www.sferaco.com E-mail : info@sferaco.fr

WATER SUPPLY BLIND FLANGE DUCTILE IRON RF PN10/16**STANDARDS :**

- Manufacturer certified ISO 9001 : 2015
- Directive 2014/68/EU : Products excluded from directive (Article 1, § 2.b)
- Flanges according to EN 1092-2 PN10-16
- Coating according to RoHS 2002/95/CE
- Epoxy painting with French agreement **ACS N° 23 MAT LY 280**

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.